


Product Datasheet

Alkaline

6LF22 Pro Power



6LF22PPG

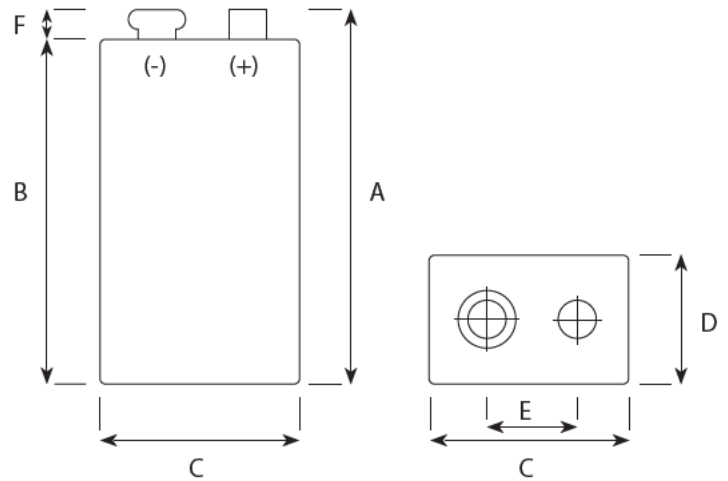

IEC Dimensions (mm)		
Dimension	Maximum	Minimum
A	48,5	46,5
B	46,2	43,2
C	26,5	24,5
D	17,5	15,5
E	12,95	12,45
F	—	1,78

Name	9V / 6LF22 / 6AM6 / MN1604 / 1604A
Made in	Malaysia
Type	Alkaline Foil
Nominal Voltage	9 Volt
Electrolyte	Potassium Hydroxide
Average weight	47 g
Storage temp. range	+15°C (59°F) ~ +25°C (77°F)
Operating temp. range	-20°C (-4°F) ~ +60°C (140°F)
Heavy metals	No added mercury (Hg), Cadmium (Cd) or Lead (Pb)
Compliant to	IEC 60086 non dangerous goods regulation EU directive 2006/66/EC
Recommended cut off voltage	4,8V per battery

For more information:

www.panasonic-batteries.com

Panasonic

Typical discharge values

6LF22PPG

