


Product Datasheet

Alkaline

Alkaline Power



LR6APB

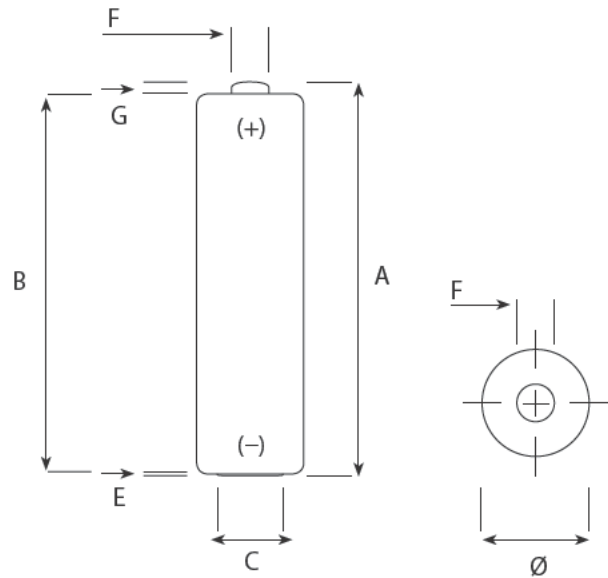

| IEC Dimensions (mm) | | |
|---------------------|---------|---------|
| Dimension | Maximum | Minimum |
| A | 50,5 | |
| B | | 49,2 |
| C | | 7,0 |
| E | 0,5 | |
| F | 5,5 | |
| G | | 1,0 |
| Ø | 14,5 | 13,5 |

| | |
|------------------------------------|--|
| Name | LR6 / M / AA / AM3 / MIGNON / MN1500 / 15A / 15AC |
| Made in | Belgium |
| Type | Alkaline Foil |
| Nominal Voltage | 1,5 Volt |
| Electrolyte | Potassium Hydroxide |
| Average weight | 22,2 g |
| Storage temperature range | +10°C (50°F) ~ +25°C (77°F) |
| Operating temperature range | -20°C (-4°F) ~ +45°C (113°F) |
| Average Impedance | +/- 105 m-Ohm @ 1kHz fresh |
| Heavy metals | No added mercury (Hg), Cadmium (Cd) or Lead (Pb) |
| Compliant to | IEC 60086 non dangerous goods regulation EU directive 2006/66/EC |
| Recommended cut off voltage | 0,8V per cell |

For more information:


www.panasonic-batteries.com

Panasonic


Typical discharge values

LR6APB


Radio 4h/d 43 ohm end 0,9 volt

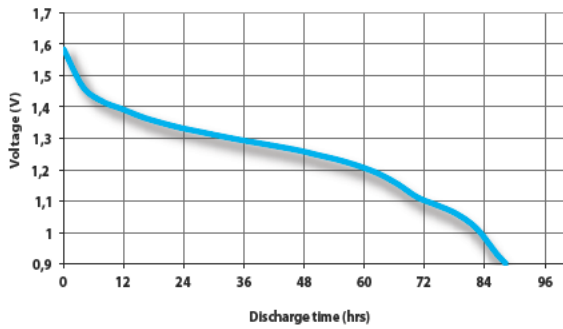


Tape 1h/d 100 mA end 0,9 volt

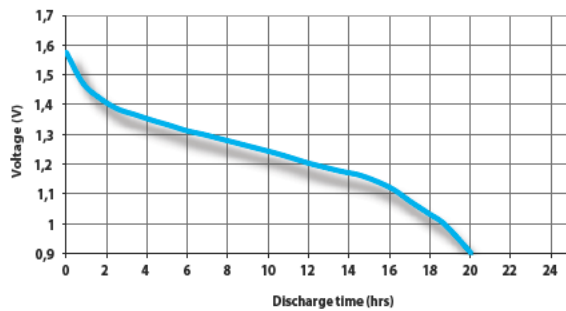


Motor 1h/d 3,9 ohm end 0,8 volt

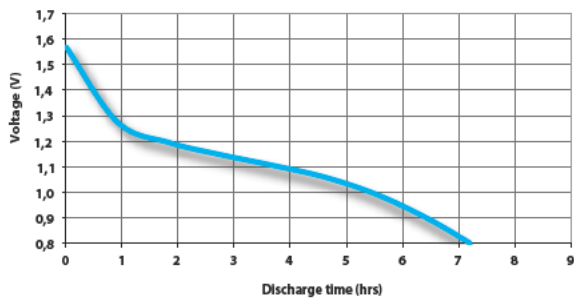


Remote Control 15s/m 8h/d 24 ohm end 1,0 volt

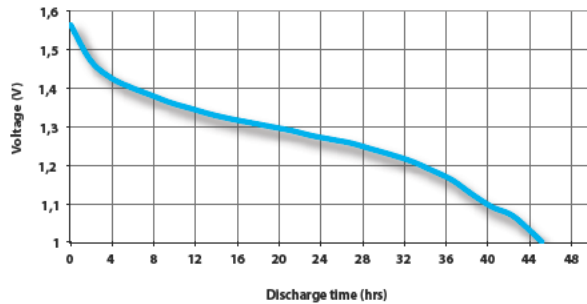


Photoflash 10s/m 1h/d 1000 mA end 0,9 volt

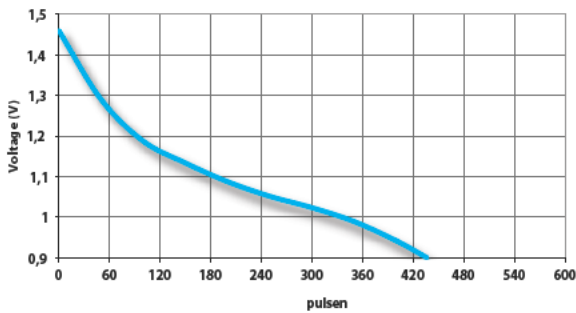

CDMD 1h/d 250 mA end 0,9 volt

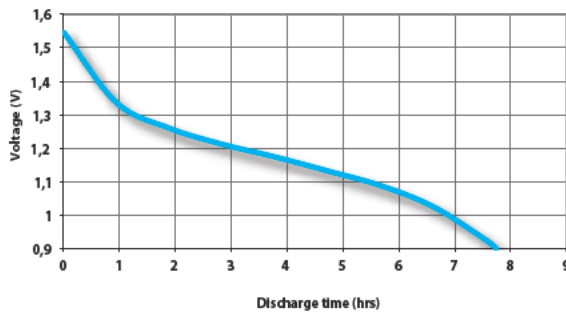

DSC 10x(2s 1,5W/28s 0,65W) 5m,55m off, 24h/d end 1,05 volt

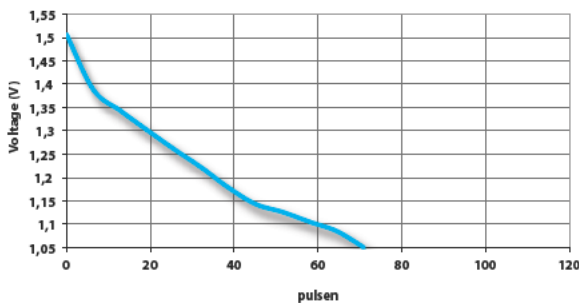

LIF 4m/h 8h/d 3,3 ohm end 0,9 volt

