


Product Datasheet

Alkaline

Alkaline Power



LR03APB

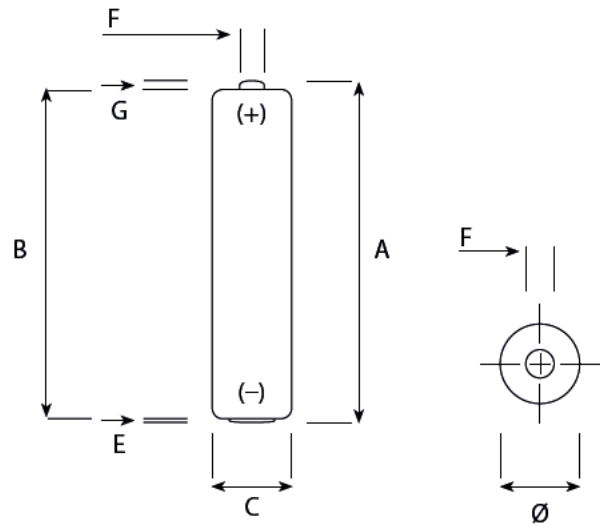

IEC Dimensions (mm)		
Dimension	Maximum	Minimum
A	44,5	
B		43,3
C		4,3
E	0,5	
F	3,8	
G		0,8
Ø	10,5	9,5

Name	LR03/S / AAA / AM4 / MICRO / MN2400 / 24A / 24AC
Made in	Belgium
Type	Alkaline Foil
Nominal Voltage	1,5 Volt
Electrolyte	Potassium Hydroxide
Average weight	11,2 g
Storage temp. range	+10°C (50°F) ~ +25°C (77°F)
Operating temp. range	-20°C (-4°F) ~ +45°C (113°F)
Average Impedance	+/- 150 m-Ohm @ 1kHz fresh
Heavy metals	No added mercury (Hg), Cadmium (Cd) or Lead (Pb)
Compliant to	IEC 60086 non dangerous goods regulation EU directive 2006/66/EC
Recommended cut off voltage	0,8V per cell

For more information:


www.panasonic-batteries.com

Panasonic


Typical discharge values

LR03APB


LIF 4m/h 8h/d 5,1 ohm end 0,9V

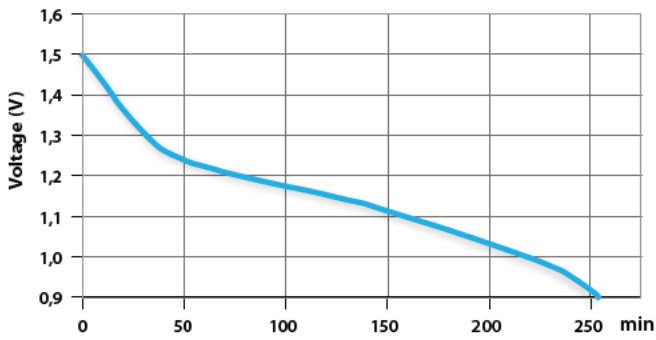


Photoflash 10 s/m 1h/d 600 mA end 0,9 V

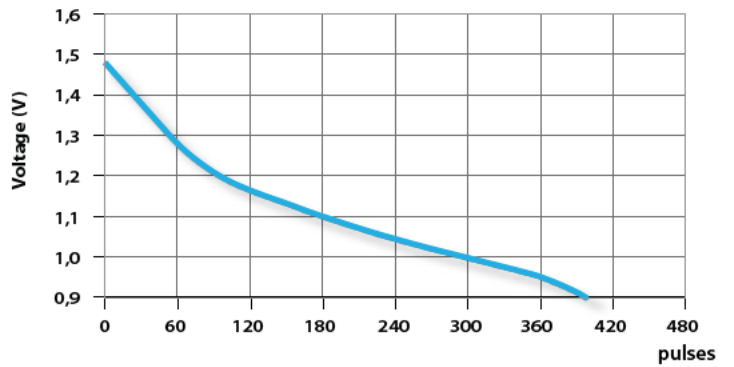


Remote Control 15s/m 8h/d 24 ohm end 1,0V

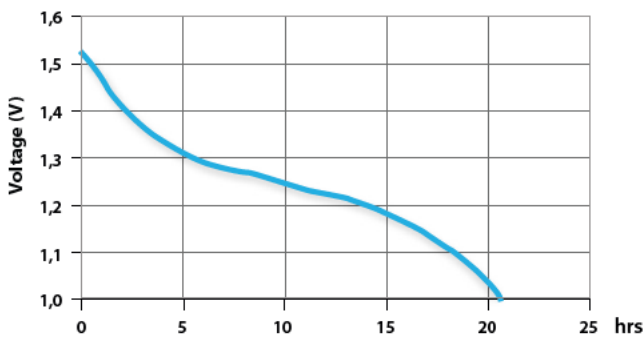

Tape 1h/d 100 mA end 0,9 volt

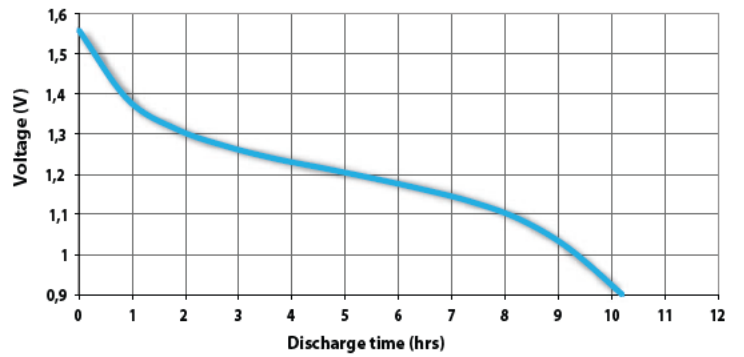

Radio 4h/d75 ohm end 0,9V

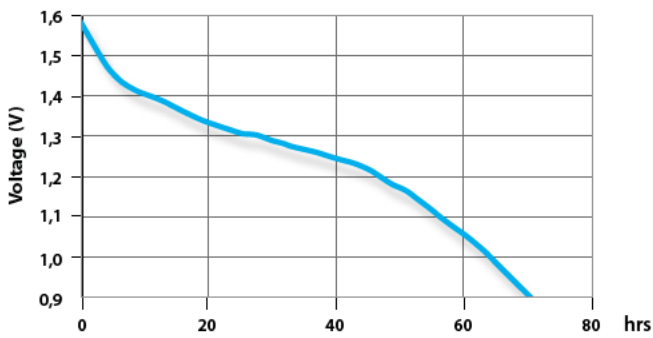

Toy 1h/d 5,1 ohm end 0,8 volt

