


Product Datasheet

Alkaline

Alkaline Power

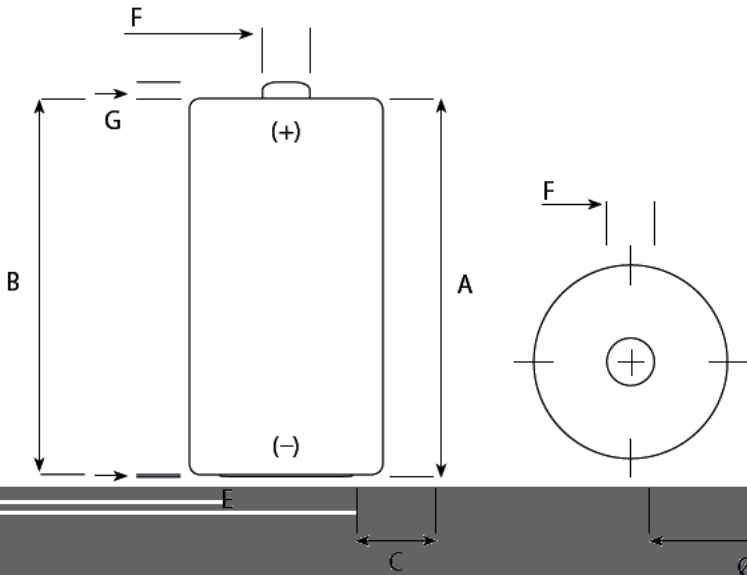

LR14APB

IEC Dimensions (mm)		
Dimension	Maximum	Minimum
A	50,0	
B		48,6
C		13,0
E	0,9	
F	7,5	
G		1,5
Ø	26,2	24,9


Name	LR14 / L / C / AM2 / BABY / MN1400 / 14A / 14AC
Made in	Belgium
Type	Alkaline Foil
Nominal Voltage	1,5 Volt
Electrolyte	Potassium Hydroxide
Average weight	66,3 g
Storage temp. range	+10°C (50°F) ~ +25°C (77°F)
Operating temp. range	-20°C (-4°F) ~ +45°C (113°F)
Average Impedance	+/- 120 m-Ohm @ 1kHz fresh
Heavy metals	No added mercury (Hg), Cadmium (Cd) or Lead (Pb)
Compliant to	IEC 60086 non dangerous goods regulation EU directive 2006/66/EC

Recommended cut off voltage 0,8V per cell


Typical discharge values

LR14APB


LIF 4m/h 24h/d 3,9 ohm tot 0,9 volt

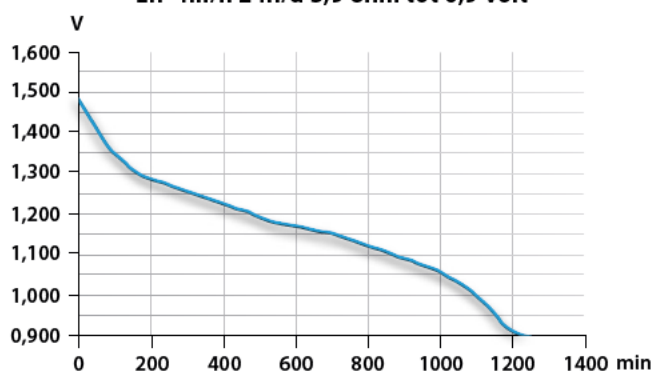

Stereo 2h/d 400 mA end 0,9 V

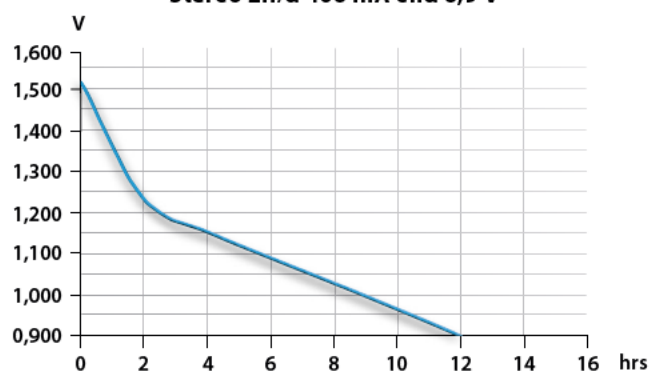

Motor: 1h/d 3,9 ohm end 0,8 V

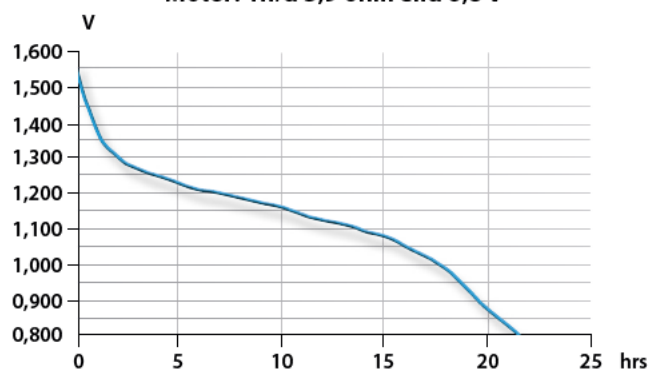

Radio 4h/d 20 ohm end 0,9 V

